



TRACE LITE
commercial & industrial lighting

barronltg.com

ROUND LED BOLLARD

26W Unit providing 3000 lumens.

360° Symmetrical distribution.

DesignLights Consortium® (DLC) PREMIUM Qualified.

AXB Series

ROUND LED BOLLARD

The sleek and compact, energy-efficient AXB Series LED round bollard provides over 70% energy savings compared to HID technology. The AXB's applications include lighting pedestrian walkways, retail entryways, as well as lighting sidewalks around schools, medical complexes, retail entrances, park/ recreational paths, office buildings, and multi-family properties. The AXB delivers up to 3,000 lumens with a polycarbonate diffused lens.




FEATURES & BENEFITS

- Die-cast aluminum head and base in a powder coat finish
- Extruded round aluminum body in a powder coat finish
- 42" Height with clean simple aesthetics that fit almost any environment
- UV stabilized polycarbonate diffused lens providing uniform soft light
- LEDs are pointing down to provide maximum lighting to the ground and minimize glare
- Vacuum metalized polycarbonate reflector to help diffuse light
- 360° Symmetrical distribution
- 26W Unit providing 3000 lumens
- Efficacies of 115 LPW maximize energy savings and utility rebates
- Available in 3000K and 4000K CCT
- Class 2 power supply, 120 to 277VAC, 50/60Hz
- 1-10V Dimming driver
- Four (4) 5/16" x 12.4" anchor bolts, nuts, and washers (included), 2.84" bolt circle
- cULus Listed for Wet Locations
- DesignLights Consortium® (DLC) PREMIUM Qualified (verify QPL for specific models)

SPECS AT A GLANCE * Nominal Wattage (Tested at 4000K CCT)

Configuration	AXB
Wattage (W)*	26W
Lumens (lm)	3000
Efficacy (LPW)	115 LPW
CCT (K)	3000K, 4000K
CRI	≥80
Input Voltage	120-277VAC, 50/60Hz, 1-10V Dimmable
Operating Temp	-40°C to 40°C (-40°F to 104°F)
Certifications	cULus Listed for Wet Location, DLC PREMIUM
Warranty	5 Years
Weight	12 lbs

Note: Environment and application will affect performance. Typical values and 25°C used for testing. Specifications subject to change without notice.

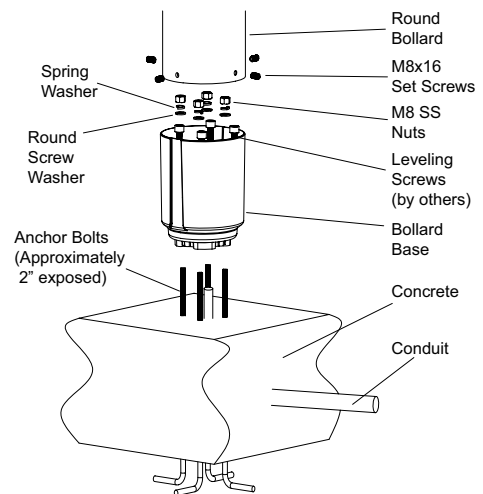

ORDERING INFORMATION (Example: AXB-VS-3K-BL)

Model	Input Voltage	CCT	Finish	Accessories ²
AXB	VS = 120-277VAC	3K ¹ = 3000K 4K = 4000K	BL = Black BR = Bronze SV = Silver	AXB-BOLTKIT = Anchor Kit (4) 5/16" x 12.4" L-Bolt Anchors and Template

Notes:

¹ Not a DLC Qualified model

² Order as separate line item for final installation in the field



Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.

10840398 MKT-LIT-AXB Rev 3 04/20



7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronlitg.com