



TRACE LITE
commercial & industrial lighting

barronltg.com

CCT & POWER SWITCHABLE LED WRAP LUMINAIRE

Cost effective 4' long LED wrap luminaire.

Power switchable between 32W, 40W and 48W.

CCT Switchable from 3500K, 4000K and 5000K CCT.

Easy ceiling or wall installation in new construction or retrofit.

Up to 123 LPW, DesignLights Consortium® (DLC) Qualified.

EWQ Series

CCT & POWER SWITCHABLE LED WRAP LUMINAIRE

Trace-Lite's EWQ series is a cost effective 4' long LED wrap luminaire that is a perfect replacement for fluorescent wraps. The unit provides flexibility while minimizing inventory by simply adjusting both CCT and wattage, from 32W to 48W offering between 3,872 and 5,616 lumens. Designed to deliver general ambient lighting in a variety of indoor settings, including schools, offices, hospitals and stores, making it the perfect choice for both new construction and retrofits. The EWQ series provides up to 123 lumens per watt, long-life, uniform illumination and standard 0-10VDC dimming capability.



FEATURES & BENEFITS

- 4' Long, die-formed steel enclosure in a white power coat finish
- Polycarbonate end caps in a white finish
- Low profile design, only 2.1" thick
- Wattage and CCT switches located inside the fixture
- Opal polycarbonate lens
- Efficacies up to 123 LPW maximize energy savings and utility rebates
- Switchable from 3500K, 4000K and 5000K CCT. Switch located inside the unit
- CRI ≥80
- L70 > 100,000 hours
- Reported L90 of 43,000 hours
- 120-277VAC, 50/60Hz
- 0-10V Dimming driver
- Power Factor > 0.90
- Power switchable between 32W, 40W and 48W
- Easy ceiling or wall surface installation in new construction or retrofit
- Simply lift the lens off for access to wiring compartment for wiring and mounting
- Easily set wattage and CCT during installation using the adjustment switches located inside the enclosure
- cULus Listed for Damp Locations
- DesignLights Consortium® (DLC) Qualified
- Operating temperatures: -20°C to 50°C (-4°F to 122°F)
- Five year warranty (terms and conditions apply)


SPECS AT A GLANCE

Length	4'
Wattage (W)*	32W-40W-48W (Switchable)
CCT (K)	3500K-4000K-5000K (Switchable)
Lumens (lm)	3,872 - 5,616
Efficacy (LPW)	≥ 123
CRI	≥ 80
Input Voltage	120-277VAC, 50-60Hz
Operating Temp	-20°C to 50°C (-4°F to 122°F)
Certifications	cULus Listed for Damp Locations, DLC
Warranty	5 Years
Weight	3.7lbs

* Nominal Wattage

Note: Environment and application will affect actual performance. Typical values and 25°C (77°F) used for testing. Specifications subject to change without notice.

DIMENSIONS

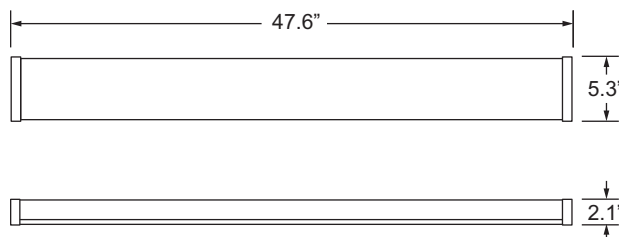

ORDERING INFORMATION (Example: EWQ-4-CP)

Model	Description
EWQ-4-CP	Low-Profile LED Wrap, 4' Length, Power Switchable 32W/40W/48W, Color Switchable 3500K/4000K/5000K CCT, 120-277VAC, 0-10V Dimming Driver, White Finish



EQUITY LINE

Specifications are subject to change without notice. Installation must be performed in accordance with Barron Lighting Group installation instructions.

10840477 MKT-LIT-EWQ Rev 2



7885 North Glen Harbor Blvd
Glendale, Arizona 85307
800.533.3948
barronltg.com